

# BLOW THROUGH VALVE

(WHPVCBOV - 25mm )



**BISSON**  
THE PIPE FITTINGS EXPERTS

A blow off valve is positioned towards the end of a pipe run, it allows dust to be blown out of the system, by attaching a compressed air line and opening the valve.

## Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint. Keep pipe clean and free from dust. Only install with approved pipe. Do not use solvents to clean, only soapy water.

**PART NO.:**  
WHPVCBOV - 25mm

**PIPE COLOUR:**  
White

**OPERATING TEMP:**  
-20°C to 50°C




**INSIDE  
DIAMETER:**  
21mm

**FITTINGS COLOUR:**  
White


**DIAMETER TOLERANCE:**  
+ / - 0.15mm'

**WALL THICKNESS:**  
2mm

**OUTSIDE DIAMETER:**  
25mm

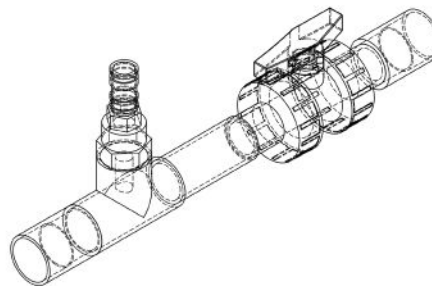

Side Elevation

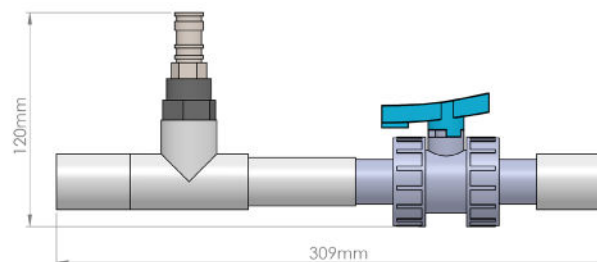

Front Elevation

